




STREAMLIGHT POLYSTINGER® LED or POLYSTINGER DS™ LED RECHARGEABLE FLASHLIGHT

MARKET APPLICATIONS: Law Enforcement, Sporting Goods, Security, Fire & Rescue, Hardware/Tool, Automotive, Industrial, Consumer
DESCRIPTION: Compact & powerful, the PolyStinger® LED and PolyStinger DS™ LED rechargeable flashlights offer 3 microprocessor controlled variable intensity modes, strobe mode and the latest in power LED technology.
CASE MATERIAL: Super-tough, non-conductive nylon polymer with non-slip rubberized comfort grip.
DIMENSIONS: PolyStinger® LED Length: 8.07 in. (20.50 cm) Diameter: Major Diameter: 1.76 in. (4.47 cm)
WEIGHT: PolyStinger® LED: 11.5 oz (326 grams)* PolyStinger DS™ LED: 11.9 oz (338 grams)*
LENS: Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.
LIGHT SOURCE: C4 LED technology, impervious to shock with a 50,000 hour lifetime.
LIGHT OUTPUT: High: 24,000 candela peak beam intensity and 185 lumens measured system output.
ON/OFF: Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations.
RUN TIME: High: Up to 2 continuous hours to the 10% output level.
BATTERY: 3-cell, 3.6 Volt Nickel-cadmium sub-C battery is rechargeable up to 1000 times.
CHARGING: Fits existing Stinger chargers. Steady charger fully recharges in 10 hours on 100V, 120V, 230V or 240VAC, or 12VDC.
FEATURES: C4 LED technology for extreme brightness. LED Charge-continuity indicator on charger base.
APPROVALS**: Most models meet applicable European Community Directives. CE
WARRANTY: Limited lifetime warranty.
OPTIONAL ACCESSORIES: 5-unit bank charger, 2.5 hour fast charger, or Piggy-Back® charger that allows for simultaneous charging of light and battery.

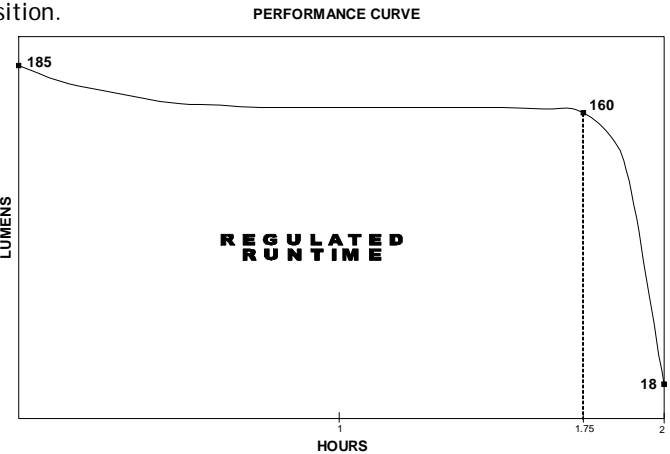

* With battery (included in purchase)
** See product for specific ratings.

Designed and Assembled In The USA.