
INSTALLATION AND USAGE INSTRUCTIONS
for the
VIKING TACTICS SLING
VTAC MK1 or VTAC MK2

We would like to thank you for purchasing the Viking Tactics Sling! This sling was designed with the tactical shooter in mind. The VTAC sling gives you the ability to quickly adjust your sling for several different shooting positions as well as carry the weapon tightly slung across your back for climbing, running, or while apprehending a suspect.



Additional Use and Installation instructions for the VTAC slings are available at www.VikingTactics.com


Using the VTAC Quick Adjust Sling

1. With the weapon slung muzzle down, (sling over right shoulder and under left arm) you are now ready to make any quick adjustment necessary.
2. If you decide to shoot from the kneeling or prone position you will be able to get to the adjustment buckle once you are in the position.
3. After firing you can simply return the sling to its previous length by pulling up on the quick adjust buckle lanyard.
4. You are also able to sling the weapon across your back for free use of your hands. Once the weapon is slung across your back, the quick adjust buckle will be on your chest, simply grab the free end and tighten to the desired tension, this will keep the weapon from bouncing around on your back.
5. Use of the Keeper – The keeper is used to store the free running end from the quick release adjustable buckle.



INSTALLATION

1. First ensure that your firearm is unloaded. Take the rear portion of the sling (adjustment section goes to the front of the weapon), and connect it to the rear stock of your rifle. Ensure that when you connect to the rear that the sling is attached to the top of the stock, not the bottom. (Note: if you have a non collapsible stock you will need our buttstock adapter (VTAC-MK3 or another connection attachment.)
2. Once the rear of the sling is connected, simply attach the adjustable portion to the front sling swivel of your carbine, it is best if you have a side-mounted swivel, or you may also connect to the front sight base.

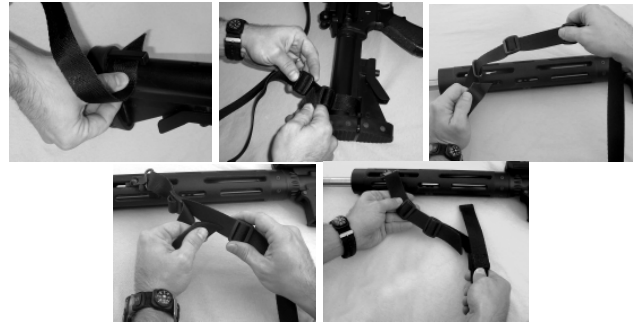

Once you have connected both ends of the VTAC sling to your rifle you are ready to make the correct adjustments.

3. Place the sling over your right shoulder, across your back, and under your left arm (opposite if you are left handed). The rear of the sling should be long enough to allow you to easily reach the free running end of the adjustable front portion of the sling under your left arm.
4. Ensure that the front portion of the sling is adjusted to its full length by lifting up on the quick adjust buckle lanyard and releasing the remaining webbing. Once you are able to reach this buckle easily it is time to move on to the front adjustment.
5. With the sling quick adjustment buckle fully released, hang the sling only around your neck. You should now be able to switch to your opposite shoulder without having the sling tighten around your neck. If you have too much tension, readjust the front attachment point to a longer setting and try again. Once the carbine can be easily placed on your non-firing shoulder, when only slung around your neck you are ready to go.

Thank you again for purchasing the VTAC Sling. For further information go to www.VIKINGTACTICS.com

*Our mission is to bring you the most relevant tactical and leadership training available.
Taught by our instructors whose real world experience and credibility are second to none.*